

12GN/12PH


Tandem Axle Gooseneck

| | | | |
|----------------------------|--|----------------------|---|
| G.V.W.R. | 12,000# | AXLES | Two 6,000# EZ Lube w/Electric Brakes |
| G.A.W.R. (Ea. Axle) | 5,560# | SUSPENSION | Multi-Leaf Slipper Spring w/Equalizer |
| COUPLER | 2-5/16" Ball Adj. Pipe/3" ID Pintle on PH | TIRE | 7.50-16 LT Load Range E |
| SAFETY CHAINS | 3/8" Grd. 70 w/Safety Latch Hook (2 each) | WHEEL | 16" x 6 HD White Spoke 8 Bolt |
| JACKS | Dual 12,000# Drop Leg Jacks (Bolted On), Single 12K TW on PH | FLOOR | 2" Pine |
| NECK | 10" Channel | LIGHTS | D.O.T. Stop, Tail, Turn & Clearance |
| TOP RAIL | None | ELEC. PLUG | 7-Way RV |
| FRAME | 12", 16# I-Beam | FINISH (Prep) | Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion. |
| CROSSMEMBERS | 3" Channel, 18" Centers | FINISH | Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish. |
| SIDE RAILS | 6" Channel w/Rub Rail and Stake Pockets on 24" Centers | | |

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Bolt On Jacks w/Greasable Handle
- Pintle has Single TW Drop Leg Jack
- 96" Overall Width
- 2 Side Bed Steps
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Tire Mount
- Rubber Mounted Sealed Lighting
- 5' Dovetail w/Double Hinged Fold Over Ramps

| Dimensions w/Dovetail | | | |
|-----------------------|------|------|-----|
| Model | A | B | C |
| 20 + 5 | 240" | 196" | 44" |
| 22 + 5 | 264" | 216" | 48" |
| 24 + 5 | 288" | 232" | 56" |
| 26 + 5 | 312" | 248" | 64" |

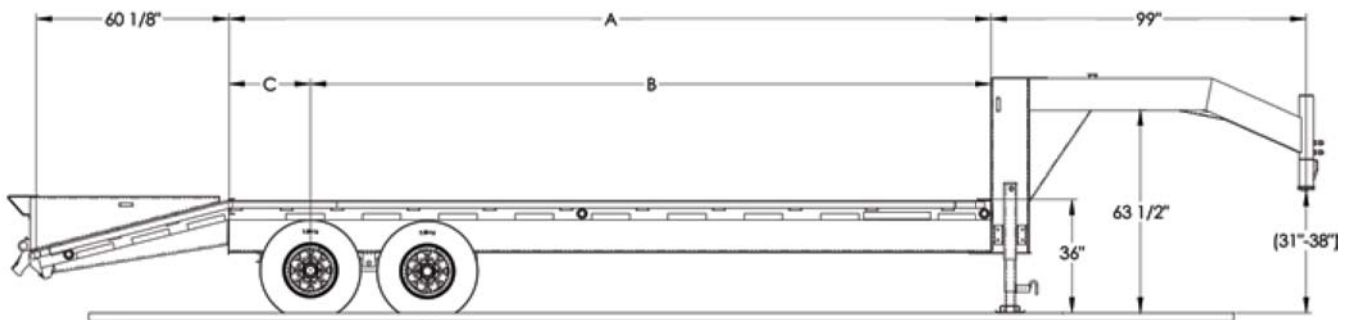

| MODEL# | WEIGHT | DESCRIPTION |
|-----------|--------|--|
| 12GN-20+5 | 4,825# | 96" x 20' + 5' Tandem 12,000# Gooseneck/Pintle |
| 12GN-22+5 | 4,985# | 96" x 22' + 5' Tandem 12,000# Gooseneck/Pintle |
| 12GN-24+5 | 5,440# | 96" x 24' + 5' Tandem 12,000# Gooseneck/Pintle |
| 12GN-26+5 | 5,695# | 96" x 26' + 5' Tandem 12,000# Gooseneck/Pintle |

OPTIONS

| | |
|------------------------------------|------------------------------------|
| Spare Tire (7.50 x 16" LT LR-E) | L.E.D. Lighting |
| Tire Upgrade (ST235/16 LR-E) | Toolbox 18" x 18" x 36" Side Mount |
| Spare Tire Upgrade (ST235/16 LR-E) | Pintle in Lieu of Gooseneck |