


14LX/14GX Tandem Axle Low Profile Extra Wide Dump

G.V.W.R.	14,000#	AXLES	Two 7,000# EZ Lube w/Elec. Brake
G.A.W.R. (Ea. Axle)	7,000#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	Adjustable Forged 2-5/16" - LX Adjustable 2-5/16" Pipe - GX	TIRE	ST235/16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 HD White Modular 8 Bolt
JACKS	LX-7K TW Drop Leg, GX-Dual 12K SW Drop Legs	FLOOR	12 Gauge Smooth Steel
TONGUE	6" Channel Fold Back	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
FRAME	6" Channel	ELEC. PLUG	7-Way RV
CROSSMEMBERS	6" Channel, 3" x 3" Tubing	FINISH (Prep)	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
BED CROSSMEMBERS	14" Centers, 2" x 2" Tubing	FINISH	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
BED LONG SILS	4" Channel		
BED SIDE RAILS	6-1/2" Formed Angle		
FENDERS	Double Square Broke Diamond Plate		

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Enclosed Pump & Battery Box Mounted in Front of Bed
- Lockable Control Unit
- Modular Sealed Wiring Harness
- 24", 12 Ga. Sides w/Formed Channel Supports
- 12 Ga. Floor
- 1/2" Tie Rail on all 4 Sides
- 20 Stake Pockets (Sides & Front)
- 4-5/8" D-Rings Inside Bed
- Fully Self Contained Electric Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Cambered EZ Lube Axles
- Complete Break-A-Way System w/Charge Line
- Grommet Mount Sealed Lighting
- Double Rear Gates w/Cam Latch and Removable Header Across Rear

Shown with Optional 2-Way Gate

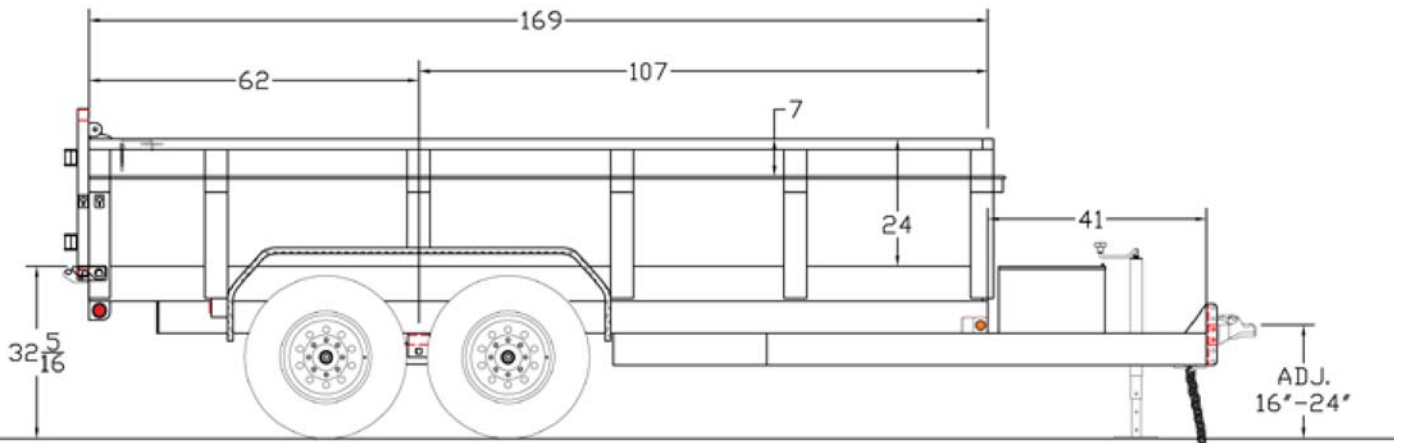

MODEL#	DESCRIPTION
14LX-14	83" x 14' Low Profile Tandem Axle Bumper Pull Dump
14GX-14	83" x 14' Low Profile Tandem Axle Gooseneck Dump

TRAILER WEIGHTS & CAPACITIES

LENGTH	EMPTY WEIGHT	PAYLOAD	BOX CAPACITY
14LX-14'	4,200#	9,760#	7.2 Cubic Yards
14GX-14'	4,600#	9,760#	7.2 Cubic Yards

OPTIONS

Spare Tire (ST235/16 LR-E)	3 Way Gate
Tire Upgrade (ST235/16 LR-G)	Wireless Remote
Spare Tire Upgrade (ST235/16 LR-G)	2 Watt Solar Charger
Spare Tire Mount (14LX-Optional, GX-Standard)	5 Watt Solar Charger
Expanded Metal Side Extensions - 14'	110V Charger
7' Slide In Ramps	Crank Style Roll Tarp