


# 20ED/20AD Pintle Equipment Transport

|                            |   |                      |   |
|----------------------------|---|----------------------|---|
| <b>G.V.W.R.</b>            | 25,900#                                   | <b>AXLES</b>         | Two 10,000# Heavy Duty Dual Wheel Axles - Oil Bath; Electric Brakes (ED) or Air Brakes (AD)                             |
| <b>G.A.W.R. (Ea. Axle)</b> | 10,000#                                   | <b>SUSPENSION</b>    | Hutch 9,700 Adjustable  |
| <b>COUPLER</b>             | 60K, 3" ID Pintle Eye                     | <b>TIRE</b>          | ST235/16 Load Range E   |
| <b>SAFETY CHAINS</b>       | 3/8" Grd. 70 w/Safety Latch Hook (2 each) | <b>WHEEL</b>         | 16 x 6 Dual 8 Bolt  |
| <b>JACK</b>                | 12,000# TW Drop Leg Jack                  | <b>FLOOR</b>         | 2" Nominal Oak (S4S)  |
| <b>TONGUE</b>              | Integral w/Frame                          | <b>LIGHTS</b>        | LED D.O.T. Stop, Tail, Turn & Clearance   |
| <b>TOP RAIL</b>            | None                                      | <b>ELEC. PLUG</b>    | 7-Way RV  |
| <b>FRAME</b>               | 12" - 16# I-Beam                          | <b>FINISH (Prep)</b> | Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.   |
| <b>CROSSMEMBERS</b>        | 6" Jr. I-Beam on 16" Centers              | <b>FINISH</b>        | Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish. |
| <b>SIDE RAILS</b>          | 8" Channel                                |                      |   |

## Standard Features

- 3 Position Pintle Adjustment
- Safety Chains Attdhd w/Cold Rolled Eyelets
- Storage Area in Tongue
- Modular Sealed Wiring Harness
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- Two (2) Side Bed Steps
- Oak Flooring
- Six 5/8" O.D. D-Rings
- Modular Sealed Wiring Harness
- 12-1/4 x 4 HD Brakes; Electric has complete Break-A-Way System and Air has Automatic Slack Adjusters, Spring Brakes and ABS
- All Rubber Mounted Sealed LED Lighting
- 5' Dove Tail w/Double Hinged Spring Assist Ramps

| Dimensions With Dovetail |      |      |      |
|--------------------------|------|------|------|
| Length                   | A    | B    | C    |
| 20' + 5'                 | 300" | 113" | 187" |
| 24' + 5'                 | 348" | 137" | 211" |

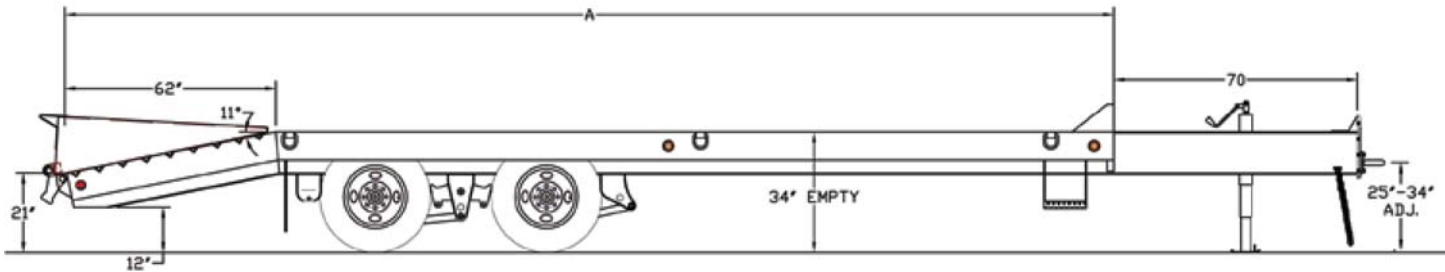

| MODEL#    | WEIGHT | DESCRIPTION  |
|-----------|--------|--|
| 20ED-20+5 | 5,900# | 102" X 20' + 5' Tandem Dual 25,900# Pintle w/Electric Brakes |
| 20ED-24+5 | 7,020# | 102" x 24' + 5' Tandem Dual 25,900# Pintle w/Electric Brakes |
| 20AD-20+5 | 5,900# | 102" x 20' + 5' Tandem Dual 25,900# Pintle w/Air Brakes      |
| 20AD-24+5 | 7,020# | 102" x 24' + 5' Tandem Dual 25,900# Pintle w/Air Brakes      |

### OPTIONS

|   |                                      |
|---|--------------------------------------|
| Vertical Spare Mount                      | Spare Tire (ST235/16 LR-E)           |
| Single 2 Speed Drop Leg Jack              | Tire Upgrade (ST235/16 LR-G)         |
| Dual 2 Speed Landing Gear Jacks (150K)    | Spare Tire Upgrade (ST235/16 LR-G)   |
| Lockable Lid Cover Tool Storage in Tongue | Tire Upgrade (ST215/17.5 LR-H)       |
| Extra 5/8" D-Ring (Each)                  | Spare Tire Upgrade (ST215/17.5 LR-H) |