


# 20GN/20PH Tandem Axle Gooseneck

<b>G.V.W.R.</b>	20,000#	<b>AXLES</b>	Two 10,000# Dual Wheel Electric Brake
<b>G.A.W.R. (Ea. Axle)</b>	9,760#	<b>SUSPENSION</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>COUPLER</b>	2-5/16" Ball Adj. Pipe or 3" ID Pintle	<b>TIRE</b>	750 x 16 Load Range E
<b>SAFETY CHAINS</b>	3/8" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b>	16 x 6 Dual 8 Bolt
<b>JACKS</b>	Dual, 12,000# Drop Leg Jacks (Bolted On)	<b>FLOOR</b>	2" Pine
<b>NECK</b>	10" Channel	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b>	None	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	12", 16# I-Beam	<b>FINISH (Prep)</b>	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
<b>CROSSMEMBERS</b>	3" Channel	<b>FINISH</b>	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
<b>SIDE RAILS</b>	6" Channel w/Rub Rail and Stake Pockets on 24" Centers		

## Standard Features


- Safety Chains Attached w/Cold Rolled Eyelets
- Dual 12K Drop Leg Jacks on GN/1-12K TW Drop Leg Jack on Pintle
- Bolt On Jacks w/Greasable Handle
- 102" Overall Width
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- Two 10,000# Oil Bath Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Mount
- Rubber Mounted Sealed Lighting
- 5' Dovetail w/Double Hinged Fold Over Ramps

### 20GN

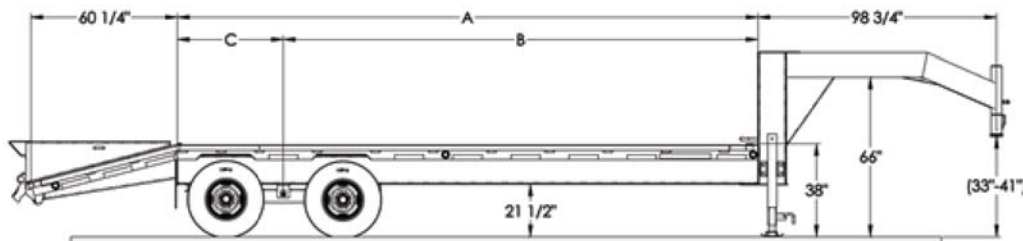

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	300"	196"	104"
24 + 5	348"	232"	116"

### 20PH

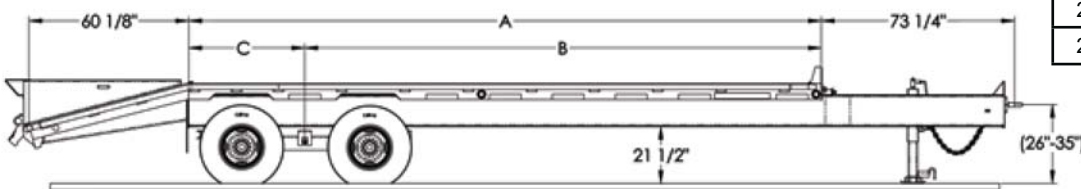

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	196"	44"
24 + 5	288"	232"	56"

MODEL#	WEIGHT	DESCRIPTION
20GN-20+5	5,620#	102" x 20' + 5" Tandem 20,000# Gooseneck
20GN-24+5	6,060#	102" x 24' + 5" Tandem 20,000# Gooseneck

### OPTIONS

Spare Tire (7.50 x 16" LT LR-E)	Center Popup Dovetail w/5' Fold Up Ramps
Tire Upgrade (ST235/16 LR-E)	No Dovetail Option
Spare Tire Upgrade (ST235/16 LR-E)	Pintle in Lieu of Gooseneck
L.E.D. Lighting	