

5XPH


Pintle Heavy Equipment Transport

G.V.W.R. 58,000#	AXLES Three 22,500# Dual Wheel Air Brake - Oil Bath
G.A.W.R. (Each Axle) 18,160#	SUSPENSION Hutch 9,700 Adjustable
COUPLER 60K 3" ID Pintle Eye	TIRE 215/75R 17.5 Load Range H
SAFETY CHAINS 5/8" Grd. 80 w/Safety Latch Hooks (2 each)	WHEEL 6.75 x 17.5, 10 Bolt Budd
JACK 12,000# TW Drop Leg Jack	FLOOR 2" Nominal Oak (S4S)
TONGUE Integral w/Frame	LIGHTS LED D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL None	ELEC. PLUG 7 Way Semi Style
FRAME 14", 26# I-Beam	FINISH (Prep) Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
CROSSMEMBERS 6" Jr. I-Beam on 16" Centers	FINISH Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
SIDE RAILS 8" Channel	

Standard Features

- 3 Position Pintle Adjustment
- Safety Chains Attchd w/Cold Rolled Eyelets
- Storage Area in Tongue
- Modular Sealed Wiring Harness w/Junction Box
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- Oak Flooring
- Six 1" O.D. D-Rings
- Anti-Skid Brake System on Front Axle
- Rubber Mounted Sealed LED Lighting
- 22.5K Heavy Duty Oil Bath Axles
- w/12-1/4" x 7-1/2" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on three Axles
- 5' Dove Tail w/Double Hinged Spring Assist Ramps

Dimensions With Dovetail			
Length	A	B	C
24' + 5'	348"	134"	214"
28' + 5'	396"	158"	238"

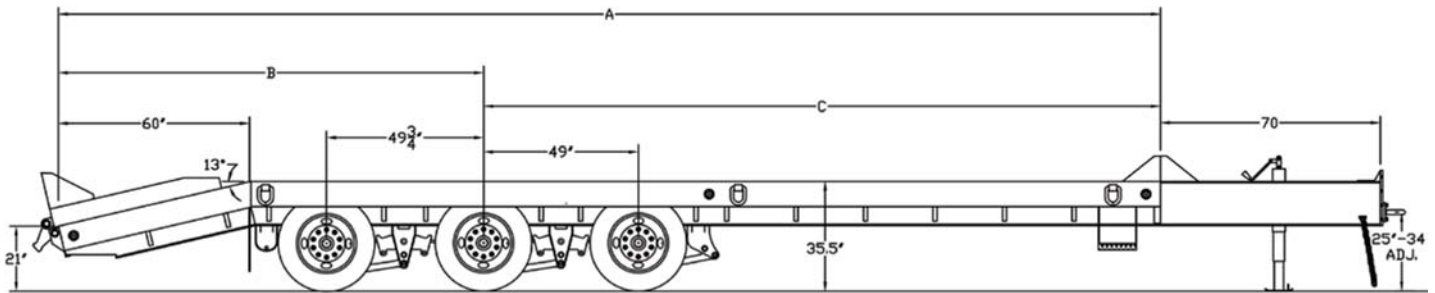

MODEL#	WEIGHT	DESCRIPTION
*5XPH-24+5	10,350#	102" x 24' Triple Axle Equipment Transport
*5XPH-28+5	10,850#	102" x 28' Triple Axle Equipment Transport

OPTIONS

Spare Tire (215/75R 17.5 LR-H)	1" D-Ring (Each)
Dual Two Speed Landing Gear Jacks (150K)	Single 2 Speed Drop Leg Jack (25K)
Lockable Lid Over Tool Storage in Tongue	Wood Fill Dovetail & Ramps
Vertical Spare Mount on Tongue	

* Trailer is subject to Federal Excise Tax