


# 60SP Tandem Axle Pipe Special

<b>G.V.W.R.</b>	6,000#	<b>AXLES</b>	Two 3,500# EZ Lube w/1 Elec. Brake
<b>G.A.W.R. (Ea. Axle)</b>	3,500#	<b>SUSPENSION</b>	Multi-Leaf Spring w/Equalizer
<b>COUPLER</b>	2" A-Frame	<b>TIRE</b>	ST205/75-15 Load Range C
<b>SAFETY CHAINS</b>	1/4" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b>	15 x 5 White Spoke 5 Bolt
<b>JACK</b>	2,000# Top Wind (Bolted On)	<b>FLOOR</b>	2" Pine
<b>TONGUE</b>	4" Channel A-Frame	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b>	2-3/8" Pipe Square Back	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	4" x 3" x 1/4" Angle	<b>FINISH (Prep)</b>	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
<b>CROSSMEMBERS</b>	3" x 2" x 3/16" Angle	<b>FINISH</b>	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
<b>UPRIGHTS</b>	16" Tall 3" x 2" x 3/16" Angle		
<b>FENDERS</b>	9" x 72" Rolled Formed w/Back		

## Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Sand Foot on Jack
- Lower Jack Support Plate
- 2-3/8" Top Rail Capped w/Self Sealing Plugs
- Floor Secured w/Torx Screws
- 4 Tie Down Loops
- Cambered EZ Lube Axles
- Two 3,500# Axles w/1 Electric Brake
- Complete Break-A-Way System w/Charger
- Grommet Mount Sealed Lighting
- Black Only

Dimensions			
Length	A	B	C
14'	169-1/2"	103"	66-1/2"
16'	193-1/2"	115"	78-1/2"

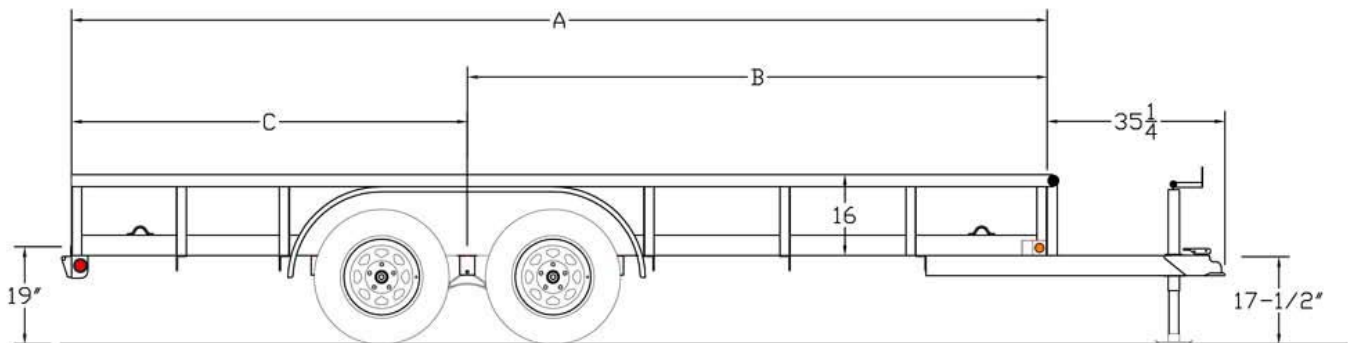

MODEL#	WEIGHT	DESCRIPTION
60SP-14	1,410#	77" x 14' Tandem Axle Trailer
60SP-16	1,610#	77" x 16' Tandem Axle Trailer

### OPTIONS

Electric Brakes on 2nd Axle	4' Slide in Ramps
Spare Tire Mount	4' Rampgate (6.5 W)
Spare Tire (ST205/75-15 LR-C)	Gas Spring Assist Option - Rampgate

STANDARD MODEL - NO OTHER OPTIONS AVAILABLE - BLACK ONLY