

GVWR: 7,000#

AVAILABLE LENGTHS: 13' & 16' (13' +3' Stationary Front)





TILT ANGLE: 12°



WEIGHT: 2,110# (13'), 2,310# (16')

COUPLER: Bumper Pull

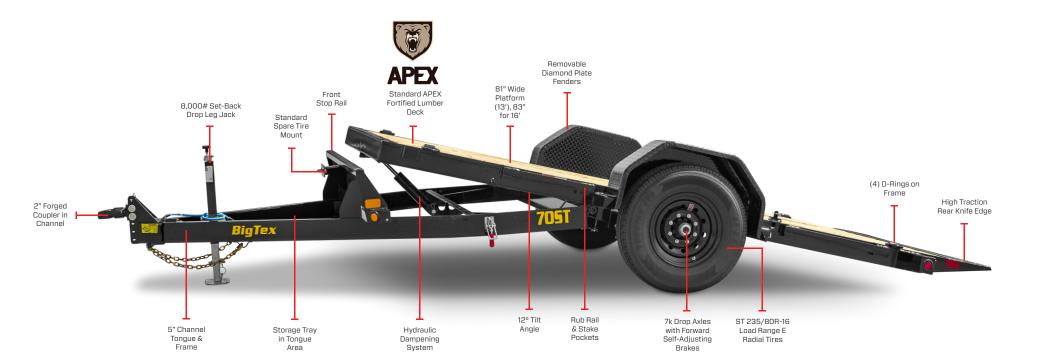



SMOOTH HYDRAULIC DAMPENING

The hydraulic dampening system under the tilt platform ensures a smooth, controlled descent while loading equipment, providing maximum protection for your cargo.



URABLE. REMOVABLE FENDERS

Double-Broke Diamond Plate Steel Fenders provide durability to withstand commercial-grade usage. Plus, they're removable, adding another level of convenience and flexibility.



LOADING ANGLE

Catering to a wide variety of equipment and small vehicles, this model offers an easy 12° loading angle and high-traction rear knife edge, facilitating simple, secure loading and unloading.



EFFORTLESS MAINTENANCE

BigTex

Our forward self-adjusting brakes make brake maintenance a breeze. The system automatically adjusts the brake shoes as they wear down, eliminating the need for manual adjustments.