

25GN


Heavy Duty Tandem Dual Axle Gooseneck

G.V.W.R. 25,900#	AXLES Two HD 10,000# Dual Wheel Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle) 10,000#	SUSPENSION Hutch 9,700 Adjustable
COUPLER 2-5/16" Ball, Square Crank Type	TIRE ST235/16 Load Range E
SAFETY CHAINS 3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL 16 x 6 Dual 8 Bolt
JACKS Dual Two Speed Landing Gear 150,000# Capacity (Bolted On)	FLOOR 2" Pine
NECK 12" Channel	LIGHTS LED D.O.T. Stop, Tail, Turn & Clearance w/Ctr Turns
TOP RAIL None	ELEC. PLUG 7-Way RV
FRAME 12", 16# I-Beam	FINISH (Prep) Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
CROSSMEMBERS 3" Channel on 16" Centers	FINISH Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
SIDE RAILS 8" Channel w/Rub Rail and Stake Pockets on 24" Centers	

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- 102" Overall Width
- Low Profile Bed
- 28' (Flat Deck) and Longer Include Torque Tube and Bridge Truss
- Lockable Toolbox Between GN Uprights
- Formed Crossmember to Frame Gussets
- Modular Sealed Wiring Harness
- Safety Reflective Marker Tape
- Rubber Mounted Sealed LED Lighting
- Two Heavy Duty 10,000# Oil Bath Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Tire Mount
- (2) Side Bed Steps
- 5' Dovetail w/Dble Hinged Spring Assist Fold Over Ramps

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	188"	52"
22 + 5	264"	216"	48"
24 + 5	288"	232"	56"
26 + 5	312"	248"	64"
28 + 5	336"	264"	72"
30 + 5	360"	280"	80"
32 + 5	384"	296"	88"
34 + 5	408"	312"	96"
35 + 5	420"	320"	100"
36			
40			

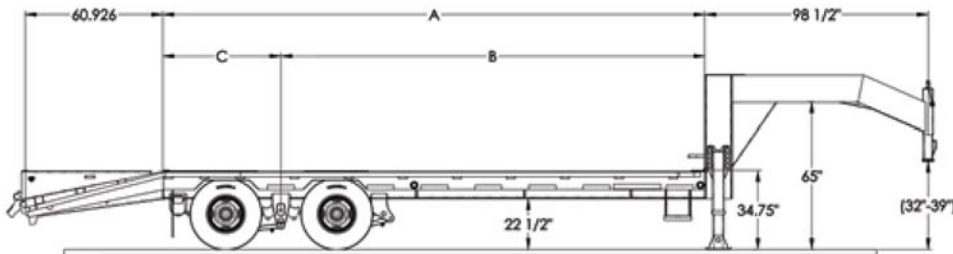

MODEL#	WEIGHT	DESCRIPTION
25GN-20+5	6,380#	102" x 20' + 5' Tandem Dual 25,900# Gooseneck
25GN-22+5	6,710#	102" x 22' + 5' Tandem Dual 25,900# Gooseneck
25GN-24+5	7,190#	102" x 24' + 5' Tandem Dual 25,900# Gooseneck
25GN-26+5	7,670#	102" x 26' + 5' Tandem Dual 25,900# Gooseneck
25GN-28+5	8,150#	102" x 28' + 5' Tandem Dual 25,900# Gooseneck
25GN-30+5	8,630#	102" x 30' + 5' Tandem Dual 25,900# Gooseneck
25GN-32+5	9,110#	102" x 32' + 5' Tandem Dual 25,900# Gooseneck
25GN-34+5	9,590#	102" x 32' + 5' Tandem Dual 25,900# Gooseneck
25GN-35+5	9,840#	102" x 35' + 5' Tandem Dual 25,900# Gooseneck
25GN-36	8,810#	102" x 36' Tandem Dual 25,900# Gooseneck (Straight)
25GN-40	9,000#	102" x 40' Tandem Dual 25,900# Gooseneck (Straight)

OPTIONS

Air Brake w/ABS on Front, Spring Brake Chambers & Auto Slacks	Tire Upgrade (215/17.5 LR-H)
Electric Over Hydraulic Brakes (Disc)	Spare Tire Upgrade (215/17.5 LR-H)
Spare Tire (235/16 LR-E)	Low Profile Tool Box 12" x 18" x 36" Side Mount
Tire Upgrade (235/16 LR-G)	Deck on the Neck (6')
Spare Tire Upgrade (235/16 LR-G)	No Dovetail Option (Straight Deck)